



VER-MAC


FLAGGER-MAC LITE US MODEL AUTOMATED FLAGGER ASSISTANCE DEVICE ON HITCH (RADIO)

Our Flagger-Mac Lite is a hitch-mounted gate that allows flaggers to safely manage work zone traffic. This device also significantly reduces the risk of accidents involving flaggers.

Its quick deployment and ease of use mean you can get started in minutes. The Flagger-Mac Lite can also be moved slowly over short distances without being disassembled, making it ideal for utility work and moving operations.

Use alone or combine with a trailer-mounted Flagger-Mac. Quickly extend or reduce your work zone by placing a Flagger-Mac at one end, and simply moving the Flagger-Mac Lite when needed.

**MUTCD
COMPLIANT**

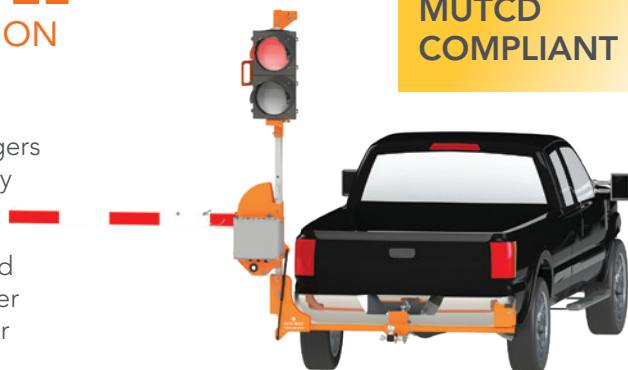

FEATURES & BENEFITS

SAFE, QUICK & EASY DEPLOYMENT

A telescopic mechanism for lamps & a rotation mechanism for the final position

TRANSPORTATION

Equipped with a hitch receptacle that can also transport a standard Flagger-Mac, part of our automated flagger line

ROBUST WIRELESS REMOTE

- Weatherproof industrial design for use under any conditions (rain, snow, cold, intense heat)
- Integrated 9-volt battery that lasts for months without recharging or changing
- Flush mount buttons to avoid non-intended actions
- Integrated LED feedback

PVC GATE

For quick and user-friendly deployment

12 IN. (305 MM - 7 FT. HEIGHT) ITE TRAFFIC LIGHTS

Meets MUTCD standards and provides superior performance, reliability and energy efficiency

SIMPLE CONNECTION

Connect to the truck's 7-pin light socket

ECO-FRIENDLY BATTERY PACK

Save on fuel: the unit operates without running the truck engine



Combo units - Transport



Wireless remote

APPLICATIONS

- Urban areas
- Construction/bridge repairs
- Secondary roads
- Utility projects

CONNECTIVITY

JAMLOGIC

JAMLOGIC FLEET MANAGEMENT SOFTWARE

Unit equipped with modem, GPS and cell plan

- Collects data
- Tracks all activities
- Automatically connected to Waze & WZDx

RADIO COMMUNICATION

Meets MUTCD communication standards

HIGH-QUALITY CONSTRUCTION

SUPERIOR POWDERED COATING FINISH (ORANGE)

Provides better resistance to impacts, humidity, and rust

BACK INDICATOR LAMP

Allows the traffic control operator to monitor units in real time from a safe distance

GAS SHOCK LIFT MECHANISM

Balances the equipment's weight, allowing effortless deployment



Storage stand option

GATE

- Material: PVC
- Reflective tape: 4 in. (102 mm)
- Gate height: 5 in. (127 mm)
- Gate length:
 - * Standard version: 72 in. (1828.8 mm)
 - * Shorter version: 48 in. (1219.2 mm)
- Located 4 ft. from the ground (48 in.)
- Operating height (up position): 135 in. (3429 mm)

DIMENSIONS AND WEIGHT

- Operating width: 161 in. (4091 mm)
- Traveling height: 60 in. (1531 mm)
- Traveling width: 77.75 in. (1975 mm)
- Weight (approx.): 200 lbs. (90.72 kg)

OPTIONS

- Audible alarm
 - Intrusion detection (including alarm)
 - Storage stand
 - Stop here sign
- Other options available.

WARRANTY

- 1 year on the equipment and on electronic components manufactured by Ver-Mac

