


❖ FLAGGER-MAC AUTOMATED FLAGGER ASSISTANCE DEVICE (AFAD)

The Ver-Mac Flagger-Mac is a trailer-mounted gate device designed for flagging operations. The Flagger-Mac system consists of two gate devices that are operated using a wireless remote controller. This technology allows the operator to fully control both devices from a safe location outside the work zone. Our Flagger-Mac also has innovative break-away arm mechanism in case of impact, adding an additional layer of protection for your workers while ensuring the safety of your equipment. Each Flagger-Mac unit is equipped with two 12-inch lamps, (1) red and (1) yellow, one gate with a flag, a V-Touch controller with wireless remote, and stealth technology.

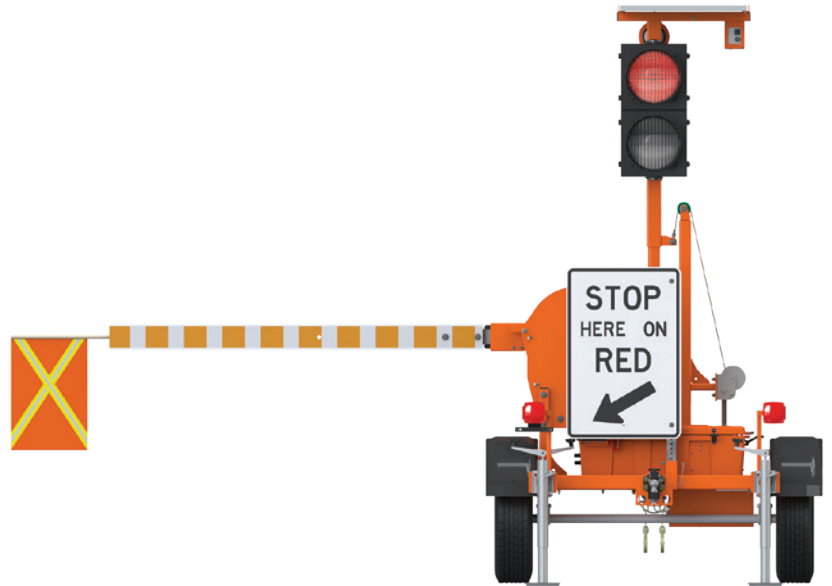

V-TOUCH CONTROLLER

The Flagger-Mac comes with our intuitive, industry-leading V-Touch controller.

- Large 7 in. (178 mm) LCD color graphic touch screen
- Intuitive point-and-go icons
- Large icons to raise and lower the gate
- Real-time display of battery / solar voltage, gate / yellow light timing



Wireless Remote

FEATURES & BENEFITS

ROBUST WIRELESS REMOTE

Operate 1 or 2 units from up to 800 feet

V-TOUCH CONTROLLER

Intuitive interface instantly provides real-time information

ITE LAMPS

Meet MUTCD standards and provides superior performance, reliability, and energy efficiency

TOWING OPTION: NESTED OR TANDEM

Save time and money by towing both units with the same truck

RED INDICATOR LAMP

Allows the traffic control operator to monitor units in real time from a safe distance

STEALTH TECHNOLOGY

Maintenance-free batteries, anti-theft hidden battery compartment



HIGH ENERGY EFFICIENT DESIGN

SOLAR PANELS

Get maximum autonomy

SOLAR REGULATOR

Protects against current overload

HIGH-QUALITY CONSTRUCTION

POWDED COATING SUPERIOR FINISH

Impact, humidity, salt spray and rust resistant

4 LEVELING JACKS

For stabilization and easy transportation

REMOVABLE TONGUE

For easy storage

MANUAL LIFT MECHANISM

For a quick deployment

HEAVY-DUTY PLASTIC FENDERS

For durability and easy replacement

PLASTIC BATTERY BOX

Holds and protects the V-Touch Controller

2-IN. (51 MM) COUPLER OR 3-IN. (76 MM) PINTLE EYE

For easy towing

GATE DIMENSIONS AND SPECIFICATIONS

- Material: PVC
- Reflective tape
- Gate height: 4 in. (102 mm)
- Gate height off the ground (down position): 4 ft. (47.25 in. / 1200 mm)
- Gate length: meet provinces requirements
- Gate operating height (up position): 166 in. (4214 mm)

UNIT DIMENSIONS AND WEIGHT

- Operating height: 129 in. (3281 mm)
- Operating width: 169 in. (4288 mm)
- Traveling height: 88 in. (2226 mm)
- Traveling width: 70 in. (1788 mm)
- Overall length: 139 in. (3534 mm)
- Axle/suspension: 2000 lb (907 kg)
- Weight (approx.): 1000 lb (455 kg)

APPLICATIONS

- City and county (Urban areas)
- Construction/bridge repairs
- Secondary roads
- Utility projects

OPTIONS

- Battery charger
- Other options are available to meet your need

WARRANTY

- 1 year on complete trailers
- 2 years on electronic components manufactured by Ver-Mac

