

❖ FLAGGER-MAC - AUTOMATED FLAGGER ASSISTANCE DEVICE AFAD-212-RADIO (US MODEL)


**MUTCD
COMPLIANT**

The Ver-Mac Flagger-Mac is a trailer-mounted gate device designed for flagging operations. Operated using a wireless remote controller, it allows flaggers to control one or two devices safely outside the work zone.

Our Flagger-Mac also has an innovative breakaway arm mechanism in case of impact, avoiding delays and preventing damage to your unit. Just snap it back into place and continue your flagging operation.



Each Flagger-Mac unit is equipped with two 12-inch lamps, (1) red and (1) yellow, one gate with a flag, a V-Touch Controller with wireless remote, Stealth technology, a rear feedback lamp and radio-based conflict monitoring.

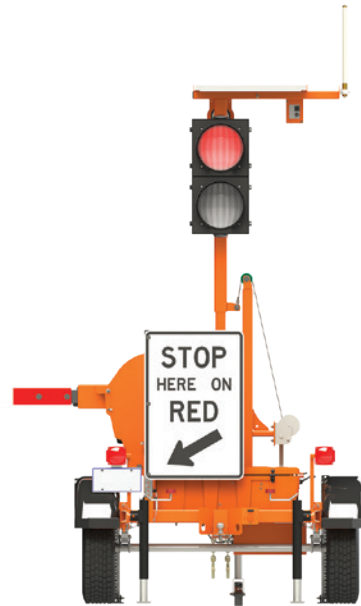

FEATURES & BENEFITS

ROBUST WIRELESS REMOTE

- Operate one or two units from up to 800 ft. away
- Units can be installed 1 mile apart and be controlled by one remote
- Weatherproof industrial design
- Battery lasts months without recharging or changing
- Easy to operate with work gloves



Wireless Remote

ITE LAMPS

MUTCD compliant, provide superior performance, reliability, and energy efficiency

TOWING OPTION: NESTED (3 ATTACHMENT POINTS) OR TANDEM

Save time and money by towing both units with the same truck

RED INDICATOR LAMP AT THE BACK

Allows the operator to monitor units in real time from a safe distance

BREAKAWAY GATE MECHANISM

In case of impact



Nested Tow Position

CONNECTIVITY

JAMLOGIC

JAMLOGIC FLEET MANAGEMENT SOFTWARE

Unit equipped with modem, GPS and cell plan

- Collects data
- Tracks all activities
- Automatically connected to Waze & WZDx

RADIO COMMUNICATION

Meets MUTCD communication standards



STEALTH TECHNOLOGY

Maintenance-free batteries, anti-theft hidden battery compartment

APPLICATIONS

- City and county (urban areas)
- Secondary roads
- Bridge construction/repairs
- Utility projects

GATE DIMENSIONS AND SPECIFICATIONS

- Material: PVC
- Reflective tape
- Gate height: 4 in. (102 mm)
- Gate height off the ground (down position): 4 ft. (47.25 in. / 1200 mm)
- Gate length: 76 in. (1930.4 mm)
- Gate operating height (up position): 166 in. (4214 mm)

UNIT DIMENSIONS AND WEIGHT

- Operating height: 129 in. (3281 mm)
- Operating width: 169 in. (4288 mm)
- Traveling height: 100 3/4 in. (2559.05 mm)
- Traveling width: 70 in. (1788 mm)
- Overall length: 94 4/16 in. (2393.95 mm)
- Axle/suspension: 2000 lbs (907 kg)
- Weight (approx.): 1000 lbs (455 kg)

OPTIONS

- Battery charger
- Waze notification
- Longer gate and reflective tape
- Intrusion alarm
- Incident video and storage

Other options are available to meet your needs

WARRANTY

- 1 year on complete trailers
- 2 years on electronic components manufactured by Ver-Mac

