




PCMS-320 TRAILER-MOUNTED MESSAGE SIGN

Ver-Mac's PCMS-320 is a mid-size full-matrix trailer-mounted portable changeable message sign. The PCMS-320 features the NTCIP-compliant* V-Touch Controller, V-Sync Wi-Fi communication, Stealth Technology, and JamLogic® Fleet Management Software.

This unit combines energy-efficient design and high-quality construction to provide the most reliable and cost-effective message signs on the market. The PCMS-320 has a compact design which makes it perfect to be used in urban areas where space is limited.

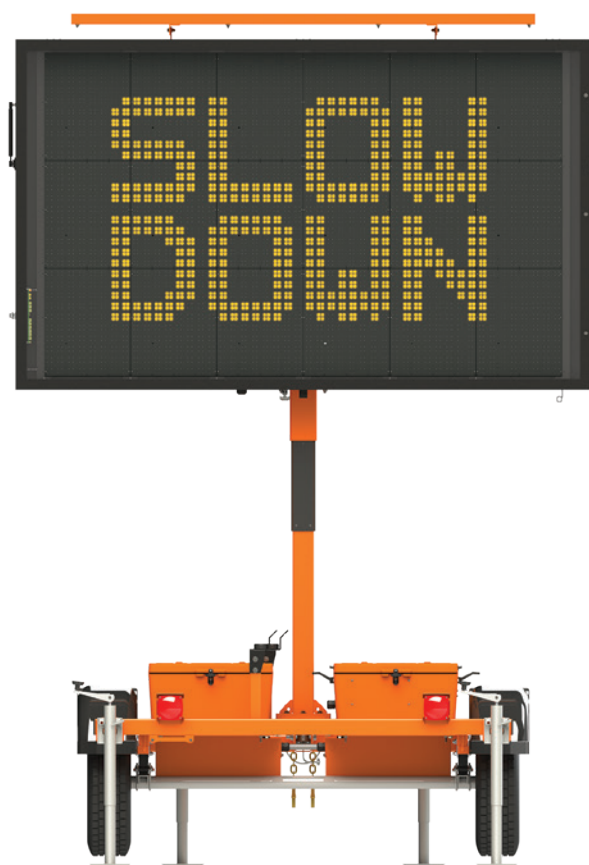

PRO SERIES FEATURES

STEALTH TECHNOLOGY

Maintenance-free batteries
Anti-theft hidden battery compartment

V-SYNC WI-FI TECHNOLOGY

Change messages locally using your smartphone
Safely change messages away from traffic

ROBUST TRAILER DESIGN

Controller located away from the road
Rugged indexed rod mast brake

FULLY-INTEGRATED CELLULAR 4G LTE MODEM

No 3G upgrade needed
10-year fleet cell service
Cell plan for smart work zones (optional)

JAMLOGIC® SOFTWARE

Hourly automated refresh and battery/GPS alerts & reports
Interactive map & list view of all equipment
Project folders to organize equipment
Logs date/time of all activated message

APPLICATIONS

- Road construction
- Department of transportation (DOT)
- City and county
- Law enforcement
- Smart work zones
- Special events

3 WAYS TO CHANGE A MESSAGE



ON THE SIGN

Using our V-Touch Controller



NEAR THE SIGN

Using our V-SYNC Wi-Fi



REMOTELY

Using JamLogic® Web on your computer, tablet or smartphone

ENERGY-EFFICIENT DESIGN

HIGH-PERFORMANCE LEDS

Create bold and bright characters with greater angularity

SOLAR PANELS

Provide maximum solar recharging year-round

- Designed to run 12 months in most regions without manual recharging

HIGH-QUALITY CONSTRUCTION

SUPERIOR POWDER COATING FINISH

Impact, humidity, salt spray and rust resistant

4 LEVELING JACKS

For stabilization and easy transportation

ELECTRO-HYDRAULIC LIFT MECHANISM

For quick and effortless deployment

REMOTE CONTROL

To safely raise and lower the mast

2-IN. (51 MM) COUPLER OR 3-IN. (76 MM) PINTLE EYE

For easy towing

RUGGED INDEXED ROD MAST BRAKE

Sign can be positioned at 270° (15° increments)

V-TOUCH CONTROLLER

NTCIP COMPLIANT

EASY-TO-READ

7-inch (178 mm) color LCD touchscreen display

USER-FRIENDLY

One-click icon-based menu items

TIME-SAVING

Create your own library of messages

SIMPLE TO OPERATE

Intuitive point-and-go icons make displaying and editing messages quick and easy to display

ADDITIONAL FUNCTIONALITIES

Scheduling, sign diagnostics, pin-protected security, and much more



DISPLAY

- Display panel: 64 x 105 in. (1625 x 2667 mm)
- Full-matrix of 30 x 48 pixels
- 4 LEDs per pixel
- 3 lines of 8 characters per line (default 5 x 7 font)
- Default font of 13.75 in. (350 mm) (5 x 7 pixels)
- Up to 3 lines & 11 characters per line (3 x 7 font)
- Plug-and-play display modules for simplified maintenance

DIMENSIONS AND WEIGHT

- Overall length: 153.5 in. (3899 mm)
- Overall width: 82 in. (2085 mm)
- Traveling height: 107 in. (2720 mm)
- Operating height: 154 in. (3905 mm)
- Axle/suspension: 3,500 lb. (1588 kg)
- Weight (approx.): 2,070 lb. (939 kg)

WARRANTY

- 1-year on complete trailers
- 2-years on electronic components manufactured by Ver-Mac

OPTIONS

- Battery charger
- Tongue wheel jack
- Radar
- Datalogger (requires radar)
- Tilt-and-rotate solar panels
- Fixed camera
- PTZ Camera

*Other options are available to meet your needs.

